

THE BC-TAP®

Boiling & Chilled Water

Available:

Boiling & Ambient Water


Chilled & Ambient Water



BC-Tap Touch



BC-Tap Lever

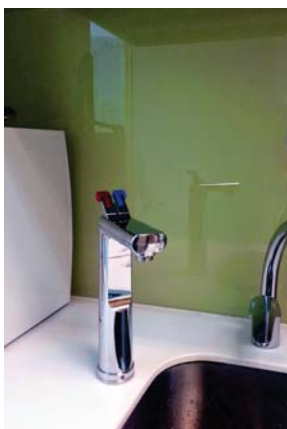

On a Sink



On a Font



Can be installed away from sink with a "Tap Font" accessory

THE BC-TAP®

Boiling & Chilled Water

It's Freshly Brewed.



Under the Sink



U-Boiler



U-Chiller



NF2 Nano-Filtration System



THE BC-TAP®


Boiling & Chilled Water

It's Freshly Brewed.




Modern Living
Smart Drinking

Modes of Dispensing Water

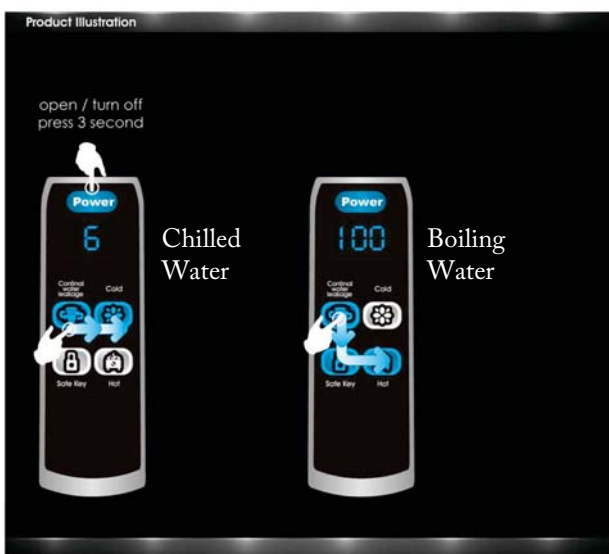

Slide to Output for 1-Minute,
Stops Automatically

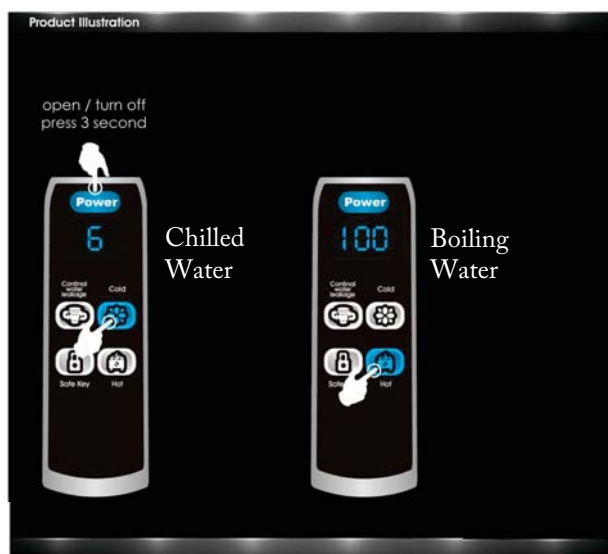

Touch and Hold to Dispense
Release to Stop




Undersink "Boiler & Chiller"

Louvered cabinet door(s) are required for ventilation



Installation Requirements

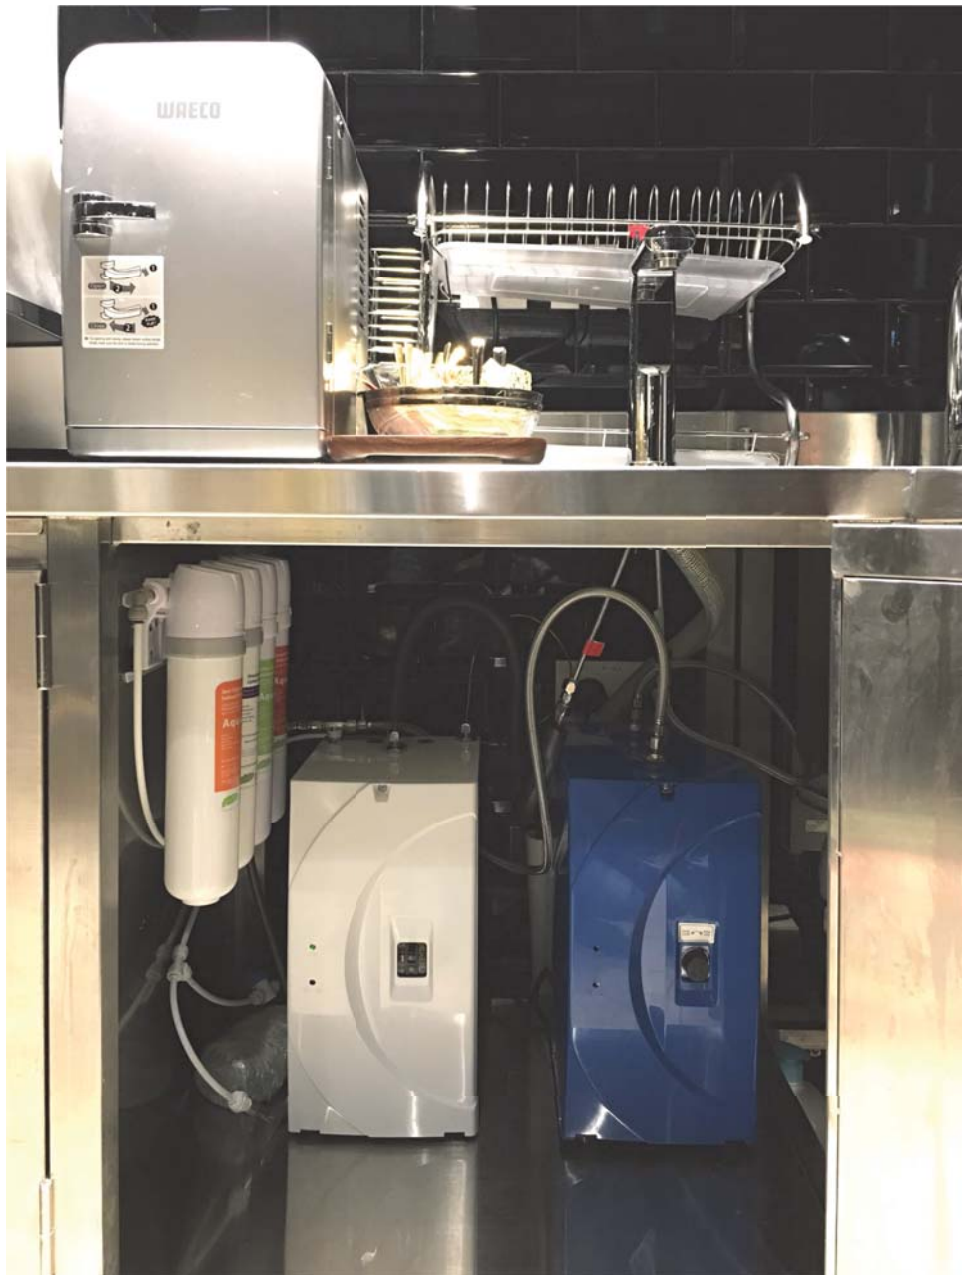

Cabinet Space:
(W) 700 x (D) 560 x (H) 750mm


Power:
13A Twin Sockets

Water Mains:
Angle Valve 1/2" External

Drainpipe:
Within a range of 60cm from point of installation

Counter-Top Hole Punch:
(On a Sink) 35mm

BC Tap

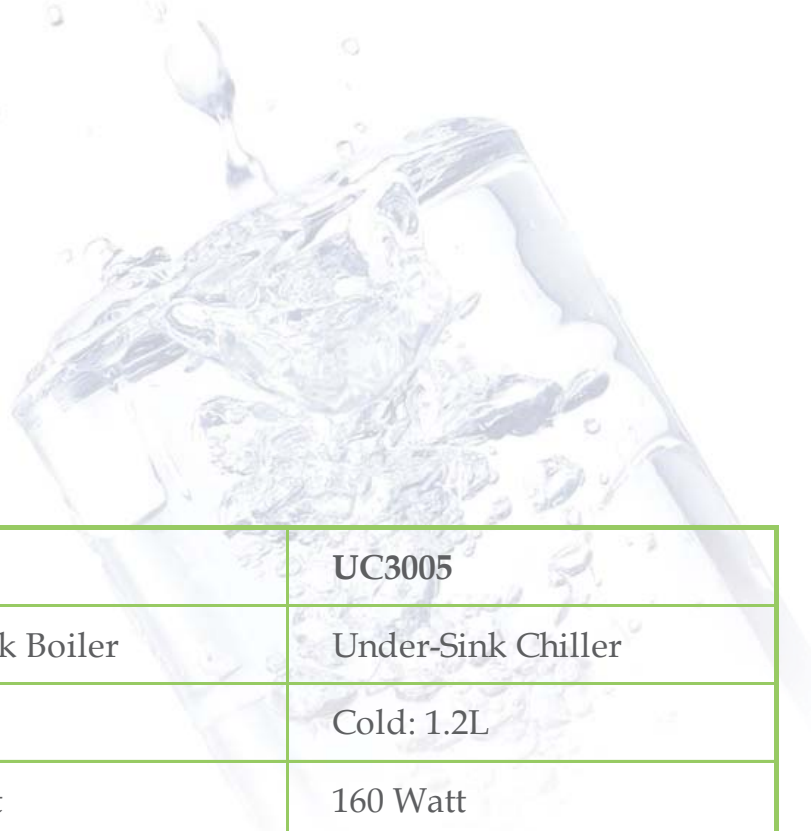

Specifications		
Model No.	UB3004	UC3005
Type	Under-Sink Boiler	Under-Sink Chiller
Tank Capacity	Hot: 4L	Cold: 1.2L
Rating @ 230V	1,200 Watt	160 Watt
Recovery Rate	36/L (Boiling Water / Hour)	12/L (Chilled Water / Hour)
Power	220-240V , 50Hz	220-240V , 50Hz
Dimension	18x24x39cm	18x32x40cm
Weight	4.5kg	12kg
Filtration System	Nano-Filtration System External Mounted	Nano-Filtration System External Mounted
Safety Design	Double Protection with Dual Thermostats	R-134A Refrigerat
	Panasonic ELCB	Panasonic ELCB
	Faucet Body : Anti-Scalded Material	Faucet Body : Anti-Scalded Material
	Stainless Steel Water Tank	Stainless Steel Water Tank
	UL Approved Insulation Foam	UL Approved Insulation Foam
Envirnmental Friendly	Energy Efficiency Design	Air-Cooled